



ALDEHYDE RESIN

POLYTONE® UA 810



POLYOLS & POLYMERS PVT. LTD.

REGD. OFFICE & WORKS -1 (VAPI):

C-1/58-59, G.I.D.C.

VAPI 396 195

GUJARAT STATE

INDIA

info@polyolsandpolymers.net

WORKS -2 (DAHEJ)

D-2/CH-266-268-269

DAHEJ – 2 INDUSTRIAL ESTATE

G.I.D.C, DAHEJ

GUJARAT STATE

INDIA

dahej@polyolsandpolymers.net

<http://www.polyolsandpolymers.net>

CELEBRATING

30
YEARS

1989 - 2019



ALDEHYDE RESINS

The traditional Aldehyde Resins produced from auto-condensed aldehydes are very rarely used in coatings. The same is not true of Urea modified aldehyde resins. Which as well as being used as coating additive to improve gloss, body and UV resistance, are known as ideal “grinding resins” for pigment pastes because of their high pigment binding power and universal compatibility. Its used in combination with other resin binders to improve its properties and production of all purpose pigment paste.

PROPERTIES

Chemical Classification	Urea & Aliphatic Aldehyde Condensation Resin
Physical Form	Lumps
Softening Point (Ball & Ring Method)	80° C – 100 ° C
Iodine Color Number	≤ 3
Hydroxyl Value	~ 40 mg KOH / gm resin
Acid Value	3 mg KOH / gm resin (Max)
Saponification Value	~ 65 mg KOH / gm resin
Tg	~ 57 ° C

SOLUBILITY

	<i>POLYTONE™ UA 810</i>
Alcohols	●
Esters	●
Ketones	●
Aromatic Hydrocarbons	●
Aliphatic Hydrocarbons	⊙ (Limited Tolerance. Tends to separate, particularly below 15° . Can be stabilized by adding 2-5 % of Aromatic Solvent)
Water	⊘

- Soluble
- ⊙ Limited Solubility
- ⊘ Insoluble

COMPATIBILITY

	POLYTONE™ UA 810
Acrylic Resins	●
Alkyd Resins	●
Aromatic & Aliphatic Epoxy Resins	●
Cellulose Nitrate/Nitro Cellulose	●
Cellulose Acetobutyrate/CAB	●
Chlorinated Rubbers	●
Epoxy Resin	●
Ethyl Cellulose	○
Hydrocarbon Resin	●
Hydroxypolyacrylate	●
Melamine Formaldehyde Resin	●
Phthalate Plasticizers	●
Urea Formaldehyde Resin	●
Vinyl Chloride Co Polymers	●


● Fully Compatible
 ○ Limited Compatible
 ⊗ Not Compatible

PERFORMANCE

	POLYTONE™ UA 810
Colorless	● ● ● ● ●
Pigment Binding Capacity	● ● ● ● ●
Pigment Wetting Capacity	● ● ● ● ●
Compatibility	● ● ● ● ●
Heat Resistance	● ● ● ● ●
Brightness	● ● ● ● ●
Weather Fastness/Weather Resistance	● ● ● ● ●
Fastness to Light	● ● ● ● ●
Rheological Properties	● ● ● ● ●
Soluble in Alcohol	● ● ● ● ●
Soluble in Aliphatic Hydrocarbon	● ● ●
Suitability for Coatings Resistant to Water	● ● ●
Suitability for Coatings Resistant to Mineral Oil	● ● ● ●
Suitability for Coatings Resistant to Saponification	● ● ●
Solvent Release	● ● ●

● ● ● ● ● : Very Good
 ● ● ● ● : Good
 ● ● ● : Fair
 ● ● : Poor
 ● : Insufficient

BENEFITS

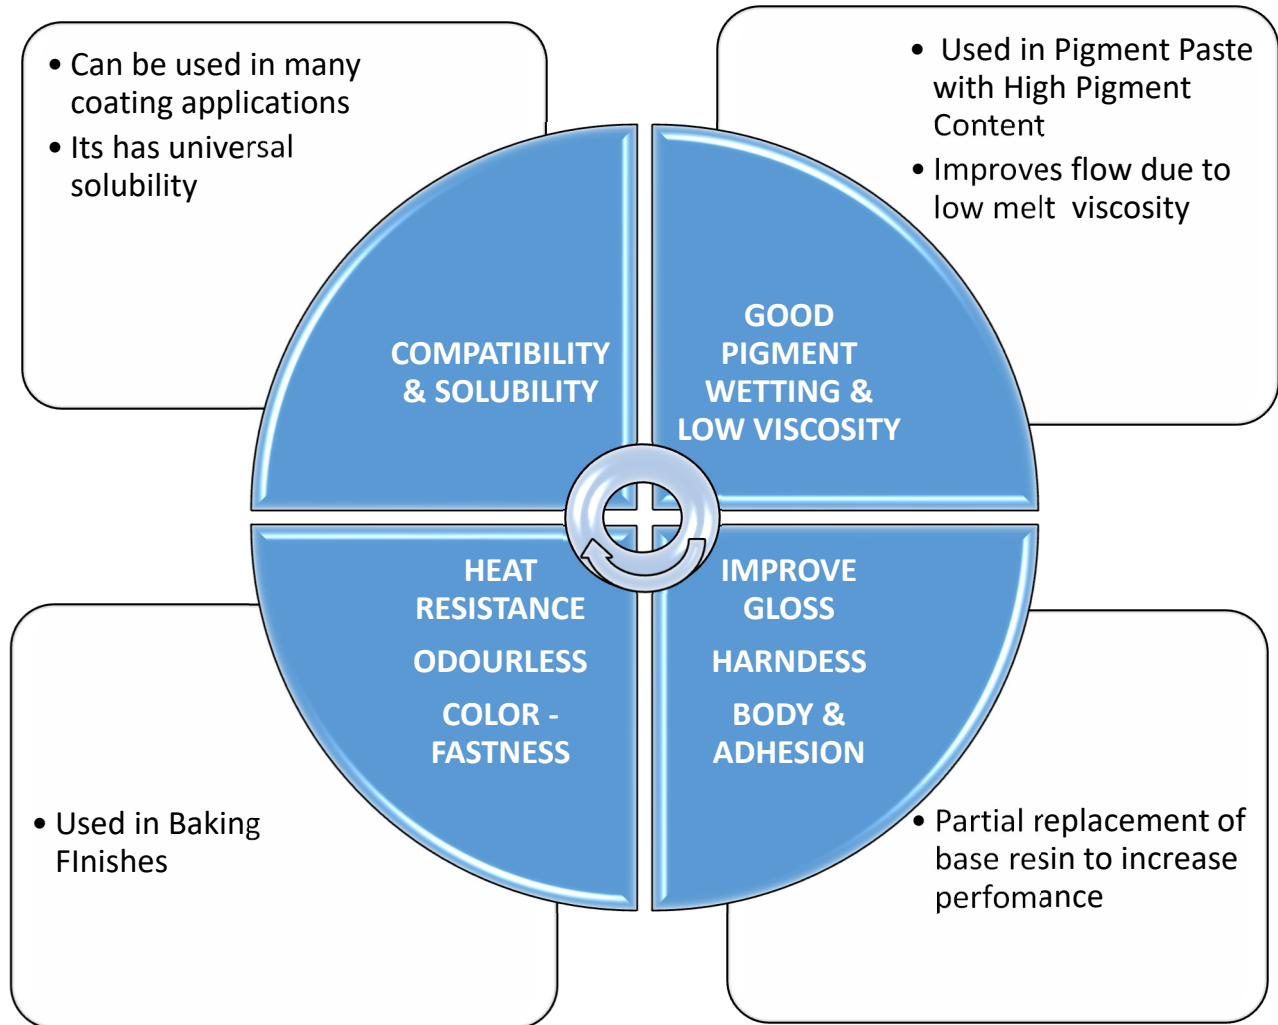

APPLICATIONS

ALKYD RESINS, AIR DRYING AND OVEN DRYING

- ▶ Replacement of up to 20% solids on solids
- ▶ Improves gloss, body, flow
- ▶ Improves yellowing resistance via heat stability
- ▶ Improves fastness to light
- ▶ Can used as a modifying component in Alkyd Resin Production

POWDER COATINGS

- ▶ Replacement of up to 15% Epoxy/Polyester or PUR
- ▶ Improves flow due to low melt viscosity

UNIVERSAL PIGMENT PASTES

- ▶ Used as grinding resin because of its universal solubility & broad compatibility
- ▶ Low solution viscosity, High pigment binding capacity & Improved Rheology
- ▶ Transparency

	<i>Organic Pigments</i>	<i>In-Organic Pigments</i>	<i>Carbon Black Pigments HCC/LCC</i>
<i>POLYTONE™ UA 810</i>	<i>25-40</i>	<i>15-25</i>	<i>25-45</i>
<i>Solvent</i>	<i>15-30</i>	<i>5-15</i>	<i>25-40</i>
<i>Dispersing agent</i>	<i>10-15</i>	<i>3-10</i>	<i>8-15</i>
<i>Anti Settling agent</i>	<i>-</i>	<i>0.3-1.0</i>	<i>-</i>
<i>Pigment</i>	<i>15-40</i>	<i>45-65</i>	<i>10-25</i>
<i>Viscosity ~ 500 – 3000 mPas</i>			

HOT MELTS FOR ROAD MARKING & SPRAY PLASTICS

- ▶ Used as basic resin in combination with suitable plasticizer due to low melt viscosity, good light fastness and heat stability
- ▶ Improves adhesion to substrate

NITRO CELLULOSE

- ▶ Improves light fastness, gloss and body

AUTOMOTIVE OEM APPLICATIONS

INTERIOR/EXTERIOR METAL COATING APPLICATION

- ▶ Heat Resistance
- ▶ Improves Adhesion to Substrate

PACKAGING, STORAGE & SHELF LIFE

Available in 20Kg or 25Kg HDPE Line KRAFT Paper Bags with Anti Static Liner.
Choice of ISPM 15 Standard Heat Treated/Fumigated Pallets or Plastic Pallets.

Individual pallets must NOT be double stacked – pastilles/lumps are likely to agglutinate.
Properties are not affected by agglutination

POLYTONE[®] UA 810 can be stored up to 24 months at temperatures below 40 °C. We suggest use within 12 months.

SAFETY

Please follow advice and information provided in MSDS. Protective clothing & workplace hygiene measure must be observed at all times.

Detailed MSDS is available on request. Email Us: info@polyolsandpolymers.net

CONTACT US

POLYOLS & POLYMERS PVT. LTD.

CIN: U24303GJ2016PTC093748

Regd. Office & Works (I)

C-1/58-59, 100 SHED AREA

G.I.D.C. VAPI

396 191

GUJARAT STATE,INDIA

TEL: +91 260 2970333

TEL: +91 9169691616

<http://polyolsandpolymers.net>

info@polyolsandpolymers.net

Works (II)

D-2/CH-266-268-269

DAHEJ – 2 INDUSTRIAL ESTATE

G.I.D.C.,DAHEJ, DIST:BHARUCH

GUJARAT STATE,INDIA

<http://polyolsandpolymers.net>

dahej@polyolsandpolymers.net

Sales : +91 982 4141 616

Technical Support: +91 937 7001 193

Operations Support: +91 982 5947 732

sdutt@polyolsandpolymers.net

info@polyolsandpolymers.net

pradeep@polyolsandpolymers.net

The information contained herein is to the best of our knowledge, accurate and reliable. The information given herein is for reference only and is subjected to change without prior notice. However, as use conditions are not within our control no guarantees are given or are to be inferred, nor is freedom from any patent to be inferred.

POLYTONE[®] is a registered trademark of Polyols & Polymers Pvt.Ltd. • ISO 9001:2015 Certified

Copyright©2020 Polyols & Polymers Pvt.Ltd.